Warranty Card

er	Name	
stomer	Address	
	Telephone No.	
Cu	Purchase date	

Please fill in this warranty card in detail and affix the dealer's seal, otherwise it will be invalid.

 The user abides by use of this manual and the correct storage conditions will have one year warranty from the date of sale.

During the warranty period, free repairs will not be provided if the following circumstances:

- 2. ① Failed to present the warranty card or proof of purchase (invoice or receipt);
 - ②Beyond the warranty period;
 - ③ Damage caused by disassembly or modification:
 - ① Damage caused by wrong/neglect use or improper use;
 - Sailure or damage caused in unusual working conditions (such as long-term use in harsh environments);
 - Appearance is naturally dirty due to use.

Distributor's Signature:	Inspector:			

SHENZHEN HECHUANG HITECH CO., LTD.

Customer Service: +86-769-82082301/+86-769-82082380

Website: https://www.hc-hitech.com

Production ADD.: F-23rd, Bldg. S6, Fenggang Tian-an Cyber Park, Dongguan, China

7



USER MANUAL

- Please read the instruction manual carefully before using the product and keep it properly.
- The contents of this manual have been carefully checked. If there are any printing errors or misunderstandings, please contact us as soon as possible.



Website

Preface

You are welcome to use HC-HITECH UVC Fluid Disinfection Module. Please read this manual carefully before use the product. It can help you to use and install more standardized and rationally so that our products can serve you more effectively. If you encounter problems during usage, please contact us in time.


Contents

Attentions······2
Product Structure·····3
Installation Notes······4
Working Method4
Application4
Parts List·····5
Main Technical Parameters······5
Hazardous Substance Declaration6
Warranty Card······7

Attentions

- 1. Do not remove the machine parts at will to avoid water leakage and damage to the machine.
- 2. Handle carefully during loading, unloading, transporting and installing.
- 3. When the machine fails, the power and water source should be cutoff quickly, and the professional technicians should be notified formaintenance.
- 4. Before connecting the product to the power supply, please check whether the marked voltage of the product and the local power supply voltage are matched, don't exceed the rated range.
- 5. If the plug, power cord or the product itself is damaged, please do not use this product.
- 6. This product is not suitable for people (including children) who lack of relevant experience and skills unless there are resnonsible oneration safety nerson.
- 7. Do not move the product by pulling the power cord.
- 8. If the water flow switch connect reversed, the module can't work properly.

Product Structure

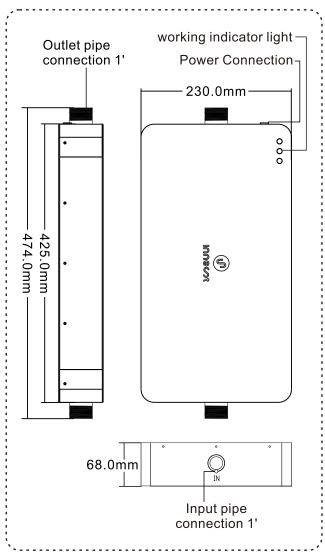

UVC-LED Whole House Water Sterilization System 75L/min

Installation Notes

Display and Function	Working Condition	
Green Light	After water pass through the product, the indicator light turns "green" to indicate entering the sterilization modefor UV working.	
Red Light	After power connection, the indicator light turns "red" to indicate product working standby.	
Orange light	After water pass through the product, the indicator light turns "orange" to indicate sterilizer malfunction.	
Water pipe	The inlet and outlet are connected to a 1' water pipe.	

Way of Working

After installed, powered on and opened the water, the green work indicator ring is lit up, and the UVC-LED water sterilizer begins to work.

Application

The UVC-LED Water Sterilization System for POE whole house water purification or other larger water flow rate water treatment applications.

Parts List

Item No.	Name	Quantity
01	UVC-LED Whole House Water Sterilization System	1
02	Power Selectable	1
03	1'external thread adapter	2
04	Water Flow Switch	1

Main Technical Parameters

Model number	HC-MKDCY-75		
Voltage	DC:12/24V		
Power	90W		
Water Pressure	0.1-0.4Mpa		
Water Source	Municipal Tap Water		
Temperature	-40-80°C		
Switch	Water Flow Switch		
Disinfection Waveband	UVC 260-280NM		
Working Current	7.5A/3.75A		
Water Flow Rate	50.0L/min		
Type of Protection against Electric Shock	II		
Water Quality	Refer to the second part of "Disinfection Technical Specifications" (Ministry of Health 2002 Edition)Min-2.1.4.1		

Hazardous Substance Declaration

In order to meet the laws and regulations related to the restriction of hazardous substances in electrical and electronic products.

After detailed internal investigation, our company is classified by parts as follows.

UVC-LED Whole House Water Sterilization System-75L/min

	Harmful Materials					
Part Name	铅(Pb)	汞(Hg)	镉(Cd)	六价铬 (Cr(VI)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
Rubber Seal	0	0	0	0	0	0
Components of Computer Board	×	0	×	0	0	0
Other metal Structural Parts	0	0	0	0	0	0
Power Adapter	×	0	0	0	0	0
Plastic Parts	0	0	0	0	0	0
Wire	0	0	0	0	0	0

This form is compiled in accordance with the regulations of SJ/T11364. Some types of products may not contain some parts in the table. Electric control board group include components, PCB, terminal blocks etc.

Remark:

- O: Indicates that the content of the hazardous in all homogeneous materials of the part is within the limit specified in GB/T26572.
- X: Indicates that the hazardous in a certain homogeneous material of the part exceeds the GB/T26572 regulation limit.



The number in the circle indicates the environmental protection use period of the product under normal use